

FN080-SDQ.6N.V7

Beschreibung / Description


Typ: FN080-SDQ.6N.V7
 3~ 400V ±10% D/Y 50Hz P1 1,6/1,0kW (1,25/0,58kW 1 1/2HP)
 3,6/1,8A DI=0% 870/670/MIN COSY 0,66 70°C
 3~ 400V ±10% D/Y 60Hz P1 2,3/1,15kW (1,55/0,50kW 2HP)
 4,1/2,0A DI=0% 930/640/MIN COSY 0,78 60°C
 3~ 460V ±10% D/Y 60Hz P1 2,5/1,4kW (1,85/0,69kW 2HP)
 4,2/2,2A DI=0% 990/710/MIN COSY 0,75 55°C
 IP54 THCL 155

Legende / Legend


- A) 3~ 400V 50Hz D [ID 67342]
 - B) 3~ 400V 50Hz Y [ID 67342]
 - C) 3~ 400V 60Hz D [ID 67343]
 - D) 3~ 400V 60Hz Y [ID 67343]
 - E) 3~ 460V 60Hz D [ID 67343]
 - F) 3~ 460V 60Hz Y [ID 67343]
- Gemessen mit üblichen Toleranzen / Measured with normal tolerances

Messaufbau:
 Ventilator montiert in Voldüse ohne Berührungsgitter.

1. Diagramm / Chart 1 - Volumenstrom / Airflow - Druckerhöhung / Pressure

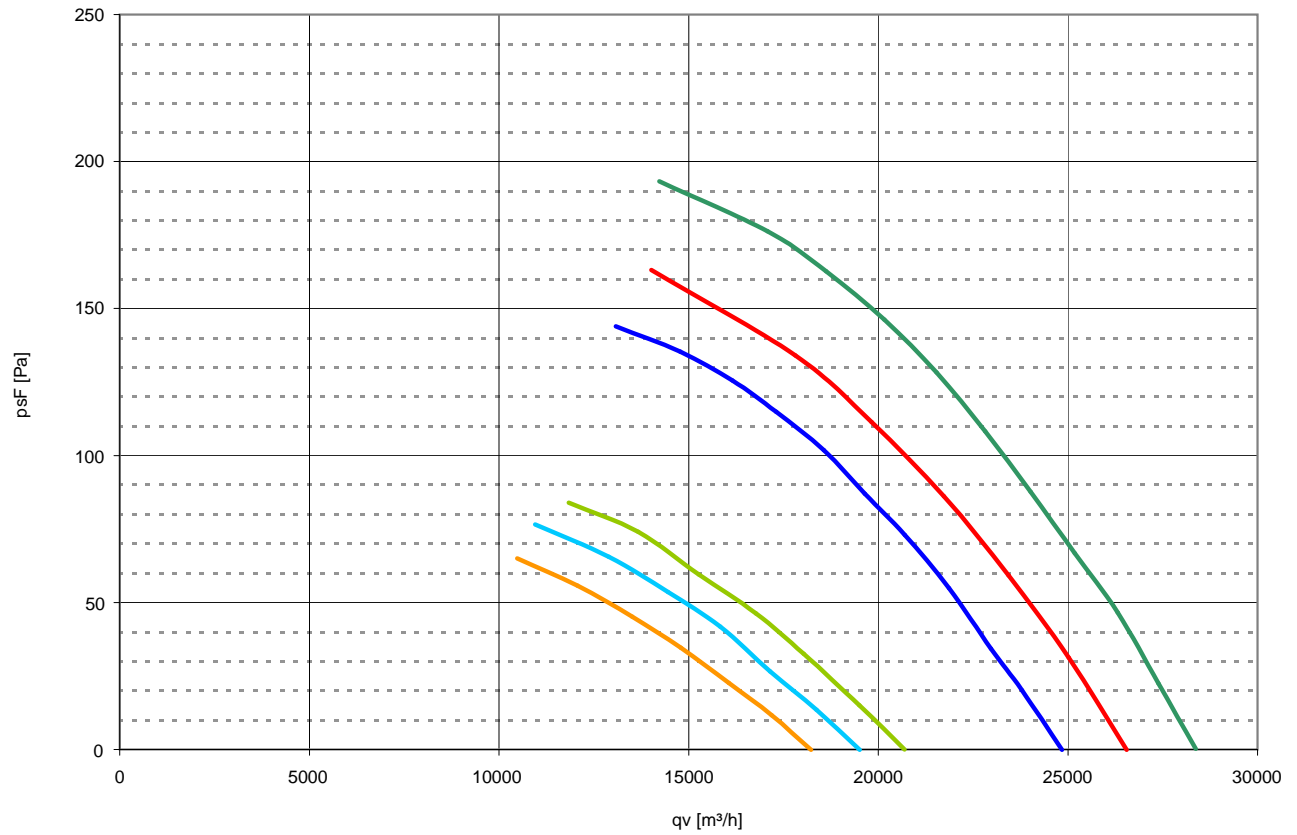

2. Diagramm / Chart 2 - Volumenstrom / Airflow - Akustik / Acoustics

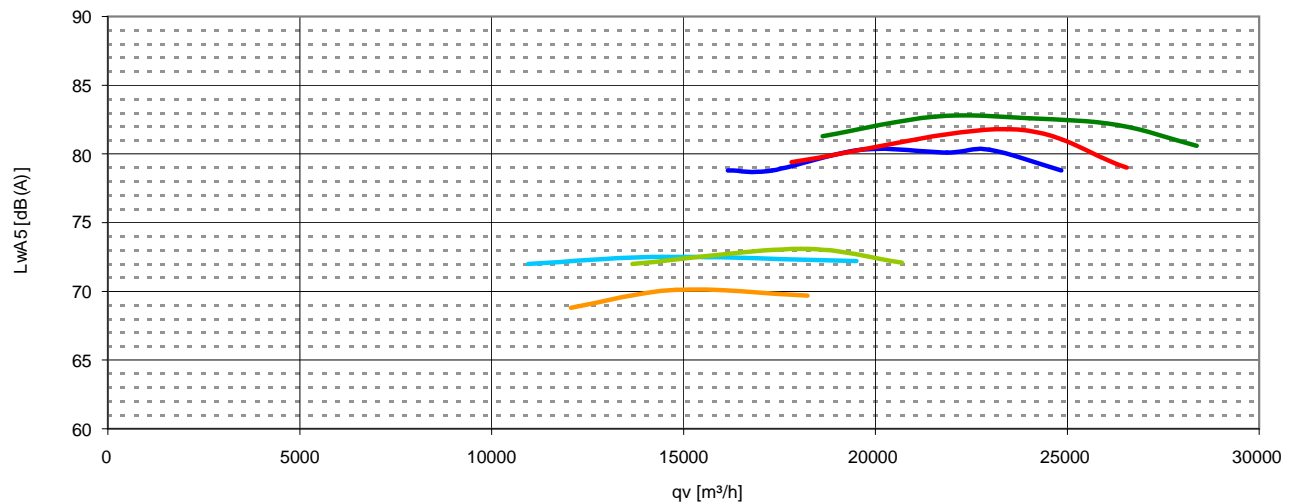

140587