

SMT050Q

STOCK 50 TON VARIABLE RENTAL AHU



Specifications:

Full Load Amps: 13A with 460/3/60 Weight: 3,200 lbs for stock models

Evap fan: Direct Drive plenum with 10HP TEFC motor

Rated cooling air flow: 6,400CFM with 100% OA, Range of 1,400 - 9,200 CFM

Maximum rated static pressure: 6.5" wg

Supply ducts: (2) 20" return ducts; (2) 20" with duct doors standard

Dimensions: 78" x 88" x 52"

Coil: Hydrophilic coated non-lanced fins with stainless steel coil supports and drain pan. Standard features: Stackable, VFD with inline starter, SS hardware, Cam-locks, butterfly valves


SMT050Q


HIGH STATIC STOCK RENTAL AIR HANDLER

- Designed specifically for rental use not modified commercial units
- Footprint of 78" x 88"
- Quick Ship and stock options for fast delivery
- Direct drive plenum blower with TEFC motor
- Quiet: < 58dBA design
- Get jobs others can't with 6.5" high static blower
- Lower equipment depreciation expense with units built to last
- Coated chilled water cooling coil with stainless steel coil supports and drain pan
- Full tubular rental frame with fork pockets & tie down points
- New cable & duct storage compartment for easy shipping
- Blower VFD standard with additional inline starter and speed pot control
- 200A Series 16 Cam-locks std
- Unit is designed for 100% outside with return air duct connections standard
- Stackable design is standard
- Marked center of gravity with options for certified overhead lift points
- Options for Victaulic or Cam-quick connections
- Other models include the 35 and 120 ton, SMT035Q and SMT120Q
- Units also available for XP service (Class 1, Div 2, Group C/D)

Smart Family of Cooling Products 1118 First Street E Humble TX 77338 281-540-2805 (phone) 281-540-8847 (fax)









www.SmartCoolingProducts.com - National Rental Sales Headquarters



SMT120Q

STOCK 120 TON VARIABLE RENTAL AHU



Specifications:

Full Load Amps: 29A with 460/3/60 Weight: 3,800 lbs for stock models

Evap fan: Direct Drive plenum with 25HP TEFC motor

Rated cooling air flow: 12,800CFM with 100% OA, Range of 4,200 - 17,000 CFM

Maximum rated static pressure: 8.0" wg

Supply ducts: (3) 20" return ducts; (4) 20" with duct doors standard

Dimensions: 130" x 88" x 60"


Coil: Hydrophilic coated non-lanced fins with stainless steel coil supports and drain pan. Standard features: Stackable, VFD with inline starter, SS hardware, Cam-locks, butterfly valve


SMT120Q

HIGH STATIC STOCK RENTAL AIR HANDLER

- Designed specifically for rental use not modified commercial units
- Footprint of 130" x 88"
- Quick Ship and stock options for fast delivery
- Direct drive plenum blower with TEFC motor
- Quiet: < 58dBA design
- Get jobs others can't with 8.0" high static blower
- Lower equipment depreciation expense with units built to last
- Coated chilled water cooling coil with stainless steel coil supports and drain pan
- Full tubular rental frame with fork pockets & tie down points
- New cable & duct storage compartment for easy shipping
- Blower VFD standard with additional inline starter and speed pot control
- 200A Series 16 Cam-locks std
- Unit is designed for 100% outside with return air duct connections standard
- Stackable design is standard
- Marked center of gravity with options for certified overhead lift points
- Options for Victaulic or Cam-quick connections
- Also offer SMT050Q, nominal 50 ton unit
- Units also available for XP service (Class 1, Div 2, Group C/D)



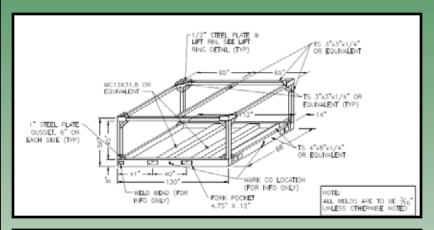

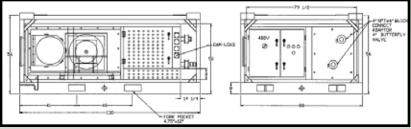



Smart Family of Cooling Products 1118 First Street E Humble TX 77338 281-540-2805 (phone)

281-540-8847 (fax)

www.SmartCoolingProducts.com - National Rental Sales Headquarters